

B.O.B. (Bi-Ocular Box)

IP66 City Surveillance POD CCTV Actively Cooled Camera Cabinet Housing




- Interchangeable camera technologies
- Aggressive thermo controlled active cooling and de-icing
- IP66 ready
- Ballistic level vandal protection options
- Gun shot detection ready
- Solar and battery UPS ready
- Adding 2-way audio and 4G/5G ready
- Ready for all PoE, routers, switches, and NVR's
- Purpose built design for smart cities

Uniquely designed to promote a virtually limitless combination of security duo video capture angles with any and all camera technologies and brands (long range, PTZ, Multi sensor, broadcast and 360°) into a simplified stand-alone enclosure system. B.O.B combines twin camera flexibility with an engineered interior that allows for cost effective offsite integration of any combination of P2P wireless, solar, 4G/5G, Edge recorders, audio, IR, encoders, beacons and much more. Ruggedized construction, double wall foam insulation, IP66 standard, heated and also actively cooled with Cooldome™, twin chemical resistant nylon lens bubbles, locking access door, din rail mounting and internal cable management.



Customizable for 1, 2, or 3 Lenses

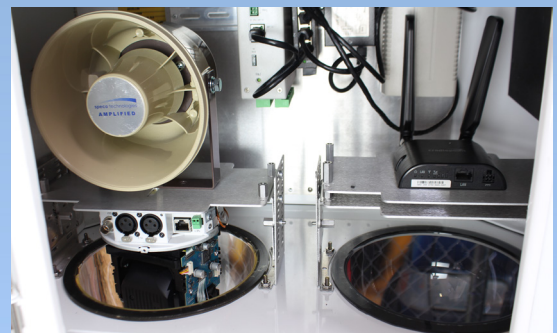




B.O.B. (Bi-Ocular Box)

Cooldome™ • Ring of Fire De-Icing • Vandalproof • IP66 • Multi sensor, dual ptz, and 360° compatible • 2-way audio • Unified solution

A complete and protected solution for multiple security cameras and components

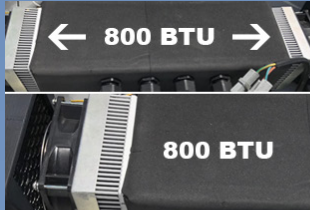

Powerful Cooldome™ Active Cooling



Structural Surface Mount Options



Hoist Attachment Points



Universal 2 Stage Cable Ingress Ports



Isolated Temp Zones



Room for All System Parts



Din Rail Internal Mounting



Locking Doors



Internal/External Cable Management




Air Tight Water Tight IP66 Equivalent



Central Heating



Rugged Construction



Custom Camera Combinations



Nylon Lens Bubbles



Pole Mount Included



Avoid Pole Clutter

Only Available at:
estore.dotworkz.com

dotworkz 
Fortified outdoor camera housings and accessories

B.O.B. (Bi-Ocular Box)

UL Pending

IP66 Equivalent

Physical Specifications:

Housing Body & Structural Shell: 5052 Aluminum; 8 gg / 0.128" Thick (3.25 mm)

Finish: White Semi-Gloss Powder Coat Finish

Dimensions (including dome) LxWxD: 23.25" x 25.25" x 16.5" (59 cm x 64.1cm x 41.9 cm)

Weight: (Dual CD w/HT Model w/ Dual 7.5" Dia. Domes: 50.0 lbs (22.7 kg)

Shipping Specifications:

Dimensions LxWxD: 26" x 28" x 20" (66.04 cm x 71.12cm x 50.8 cm)

Weight: 58.0 lbs (26.3 kg)

Power Input:

Voltage Input: 90 – 305 VAC, 47-63 Hz

Power Consumption Per Cooler Type: 3A @ 115 VAC w/ Cooling Engaged. 0.2A @ 115 VAC Passive Mode

More Features:

Unsurpassed Environmental Protection Housing for Citywide & Industrial Deployments

Rugged Dual Dome Design, with Spacious Room for Cameras & other Electronics

Stylized Sealed POD Box for Integration of a wide variety of cameras & Electronics accessories

800 BTU Total Active Cooling (Dual 400 BTU Independently Thermostatically Controlled)

Cold Weather Protection - 65 Watt Total Heaters:
(Dual 32.5W Independent Thermostatically Controlled)

Large Lockable Front Access Door; 2 Keyed Secure Locking Compartments:

Dual Universal Camera Mount Integration Brackets

Standard with Dual 7.5" High Impact Nylon Clear Dome Bubbles Installed – Dual Dome Camera Ready

Large IP66 / NEMA 4X Fully Sealed, Camera & Electronics Integration Compartment

Easy to Access & Install Design with 3 Large Accessory Mount Wall Panels, Plus Door Mount Surface

