

D

C

B


A

D

C

B

A

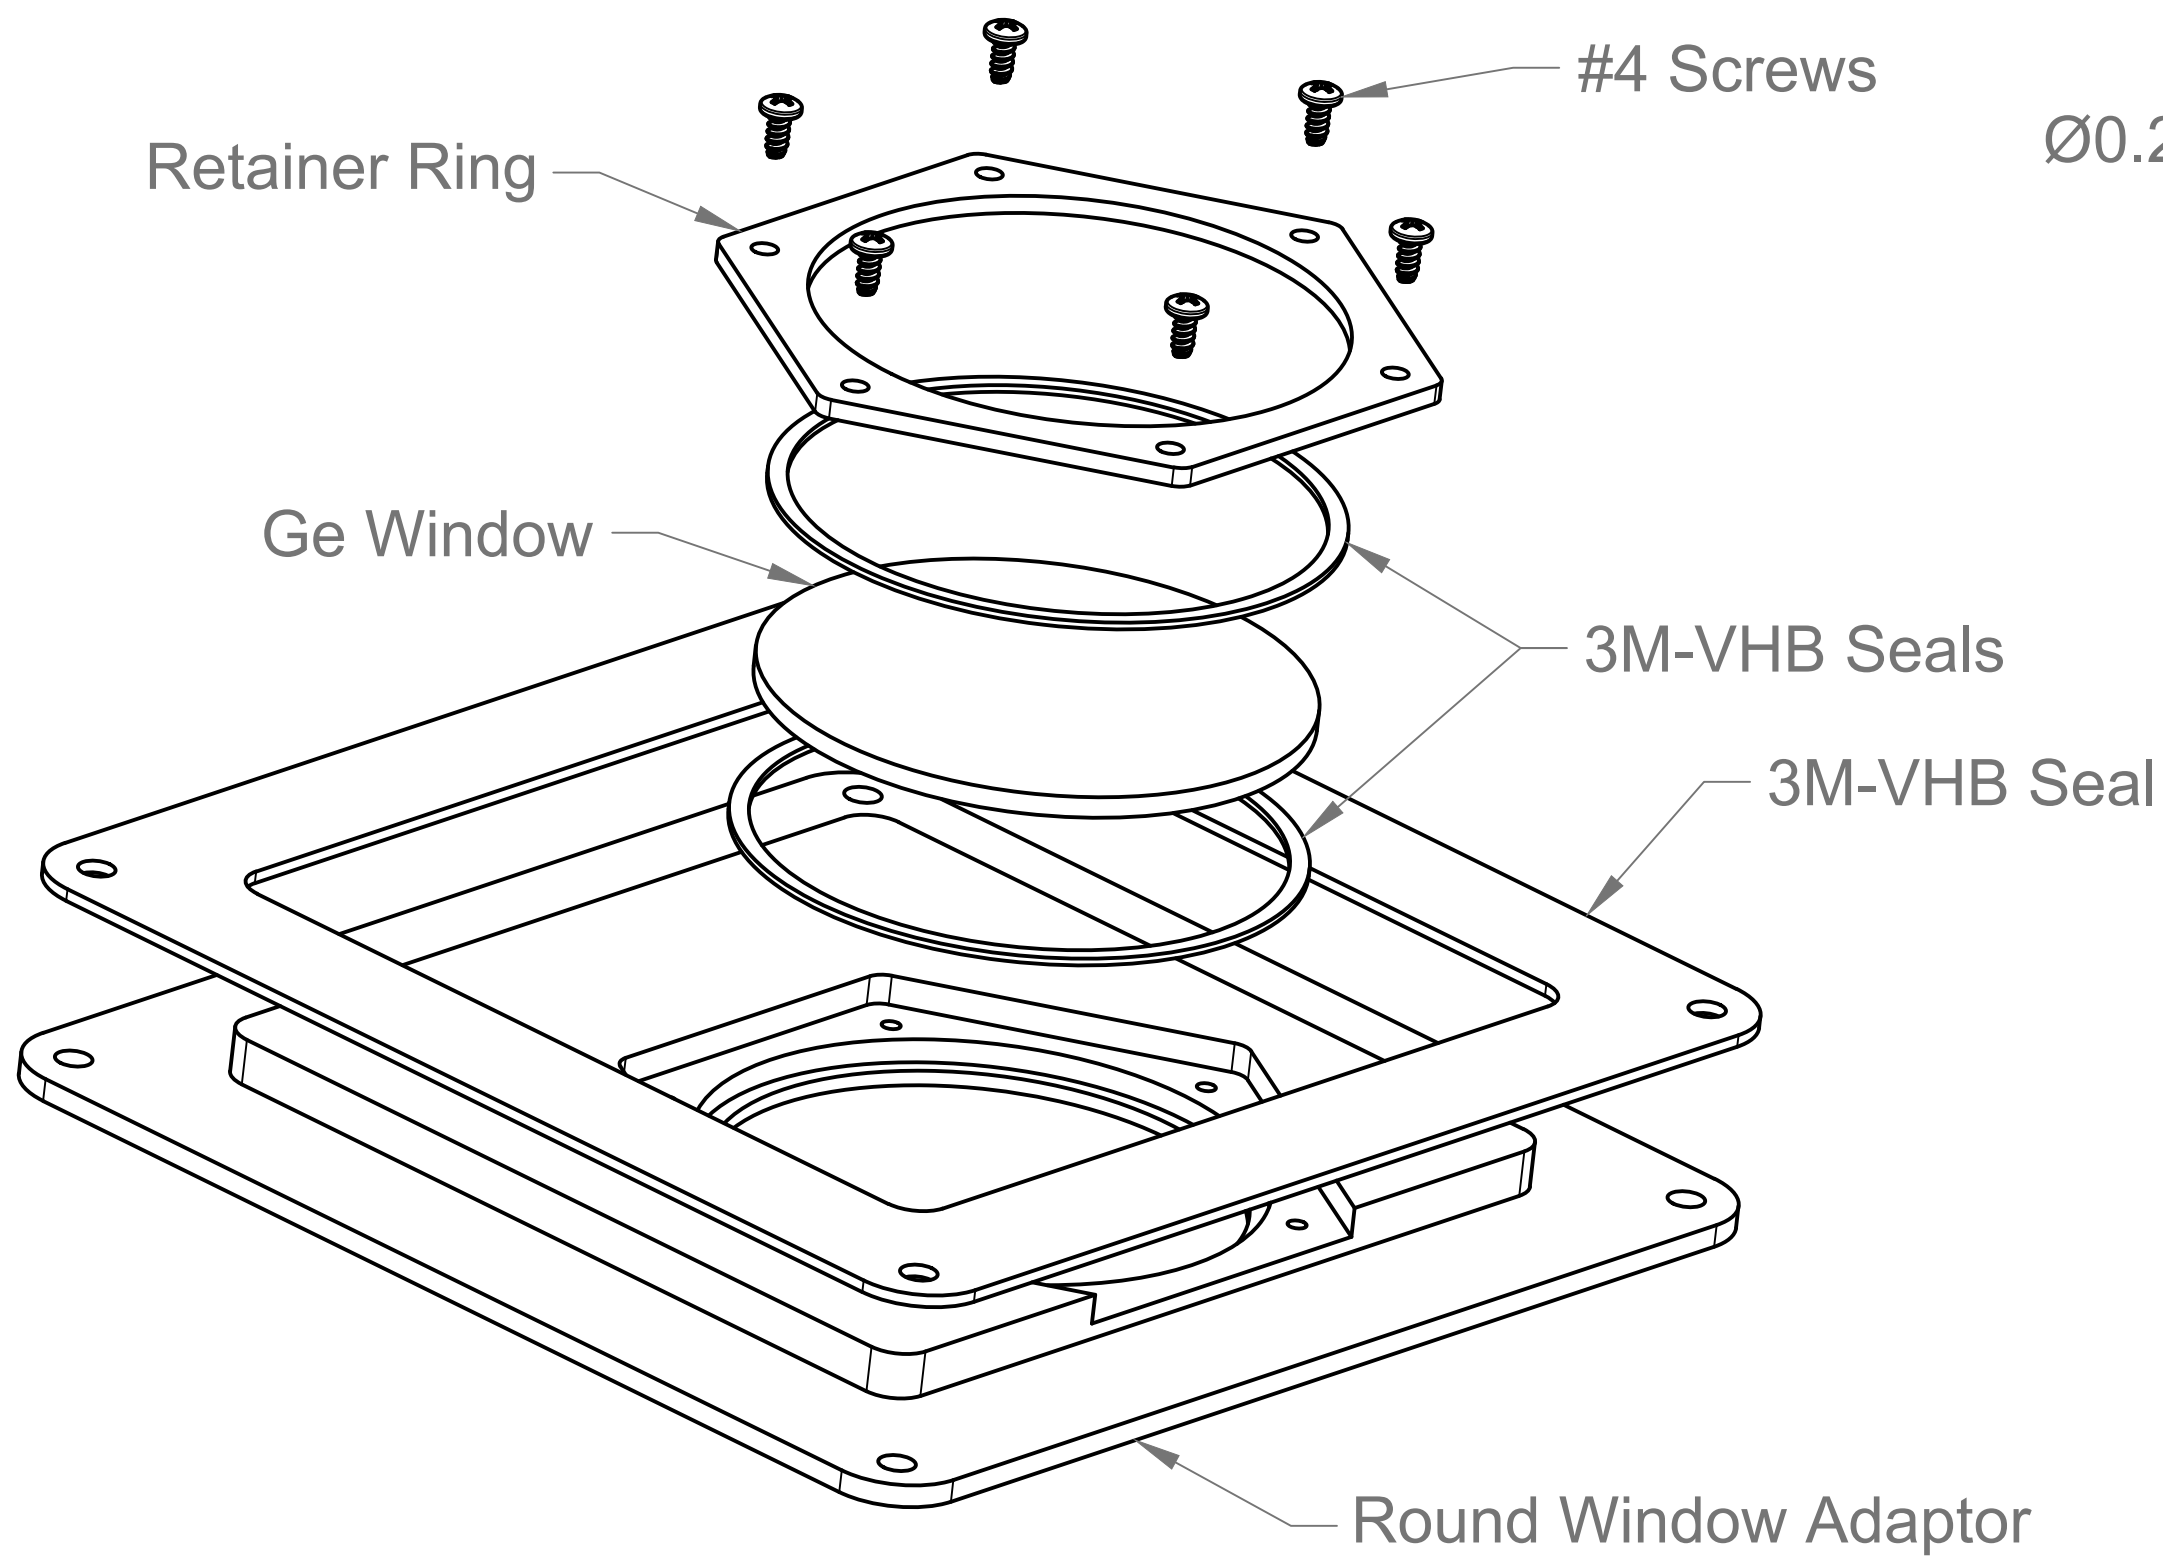


Ø0.20

4.98


4.98

6.60


6.60

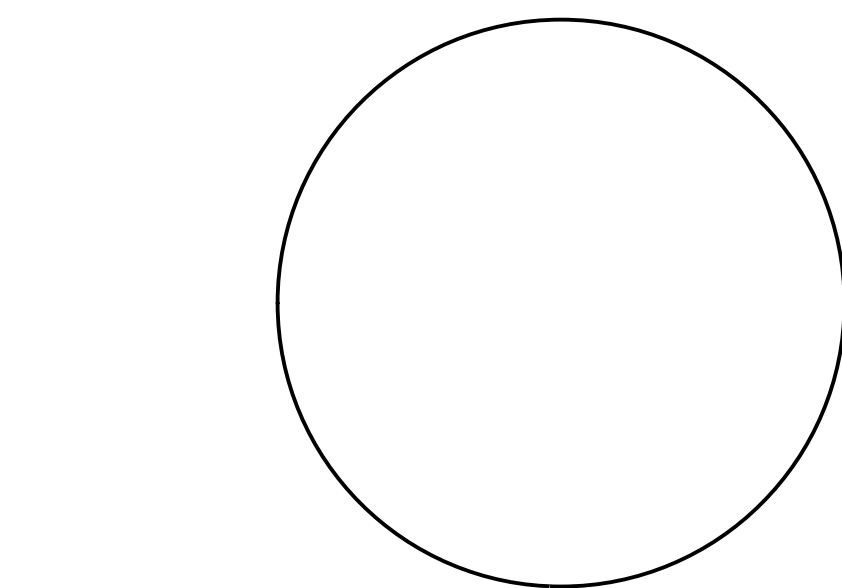

Ø2.95 [Ø75mm]

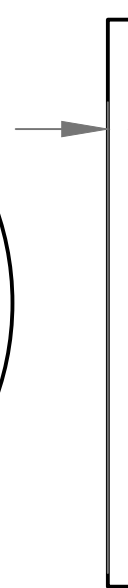

0.12 [3mm]

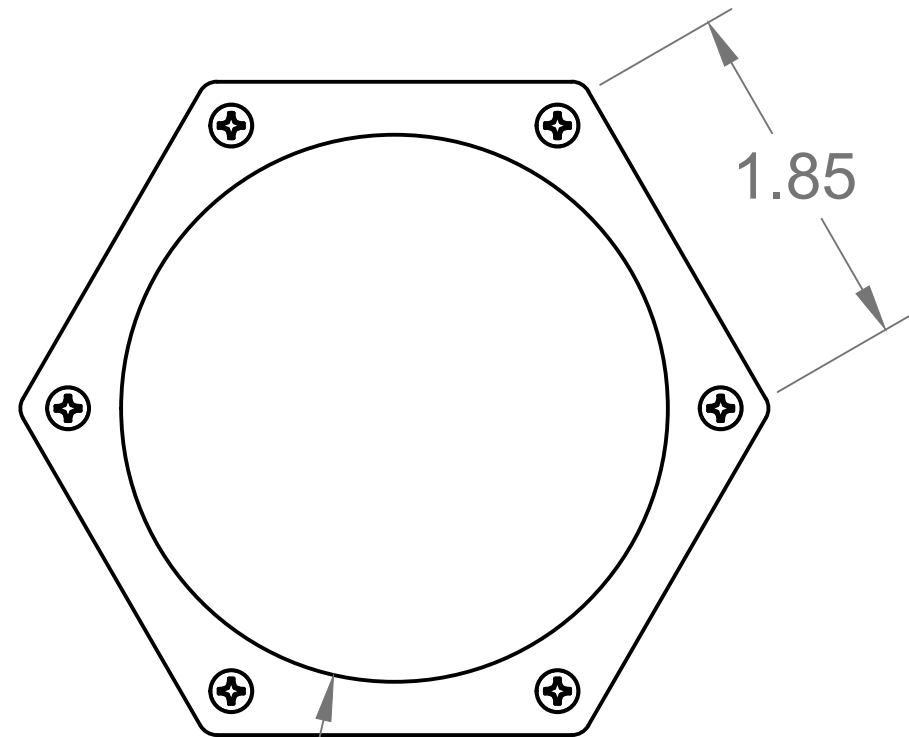

Ø2.85in [Ø72mm]

1.85

Note: Window adaptor achieves IP66 and NEMA 4X ratings when installed with VHB seal, ensuring a fully sealed enclosure.

Ge Window

Windows can be customized per application for material and thickness requirements.

Window aperture can be adjusted per lens requirements.

	DEPARTMENT		DOTWORKZ			
	RESEARCH & DEVELOPMENT					
<div>dotworkz</div> <div>9340 Stevens Rd, Santee</div> <div>CA 92071</div> <div>PH: (866) 575-4689</div> <div>sales@dotworkz.com</div> <div>www.dotworkz.com</div>	<div>PROPIETARY AND CONFIDENTIAL</div> <div>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DOTWORKZ Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DOTWORKZ Inc. IS PROHIBITED.</div>		TITLE			
	APPROVED		SIZE	CODE	DWG NO	REV
	CHECKED		C	STXL	STXL-GeWA	010
	DRAWN Manuel Ochoa 5/22/2025		SCALE 1:1		WEIGHT	SHEET 1/1