

Ordering PN:

D3-CD-EXT75

D3 Cooldome™

Active Cooled IP66 Housing with integrated dual coolers & external 7.5" dome kit.

Overview

The Dotworkz D3 Cooldome™ is an actively cooled camera enclosure engineered for demanding outdoor surveillance environments. Designed with Dotworkz Cooldome™ thermo-electric cooling technology, it protects sensitive cameras, encoders, NVRs, small computers, switches, wireless radios, and other electronics from heat damage caused by direct sunlight and extreme heat conditions. Ideal for high-heat zones, remote deployments, AI cameras, railways or critical infrastructure applications.

Key Features




- **COOLDOME™ Active Cooling:** Dual thermo-electric cooler maintains internal temperatures up to 50°F cooler than ambient air.
- **Thermally Protected:** Polycarbonate shell with an integrated foil and foam thermal blanket minimizes heat buildup from solar radiation and UV exposure.
- **IP66 Rated:** Airtight, watertight, and dustproof design ideal for marine, desert, and urban installations.
- **Internal Storage Space:** Protects peripheral devices from extreme heat.
- **Always-On Internal Cooling:** Temperature control circuits regulate internal temperature.
- **Optimized for Integration:** Supports internal networking, recording, and wireless gear with up to 3A camera power output.
- **Dome Lens:** Upgraded larger 7.5" diameter for large form factor dome for PTZ cameras. Impact resistant nylon material (available in clear or tinted)

Product Attributes

- **Power Consumption (without camera):** 13 amps @ 12 VDC (per cooler, 2x coolers)
- **Input Power Source Options:** 12 VDC, 110 V AC, or 220 VAC
- **Output for Camera Power:** 12 VDC
- **Internal Power Available for Camera:** 3 amps @ 12 VDC
- **Operating Temperature:** -25°C - +65°C (-13°F - +149°F)
- **Active Cooler:** 400 BTU x2 (800 BTU) Thermostatically Controlled
- **Fan:** 25 CFM Always On
- **Warranty:** 1 Year Limited Warranty

Dimensional Specifications

Product	Weight: 11.6 lbs	Dimensions (L x W x H): 14.9" x 11.7" x 17.5"
	Weight: 5.3 kgs	Dimensions (L x W x H): 380mm x 296mm x 445mm

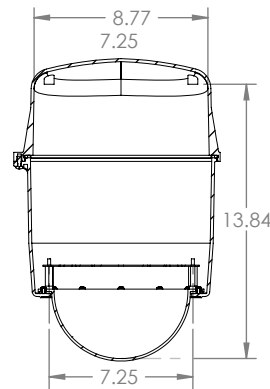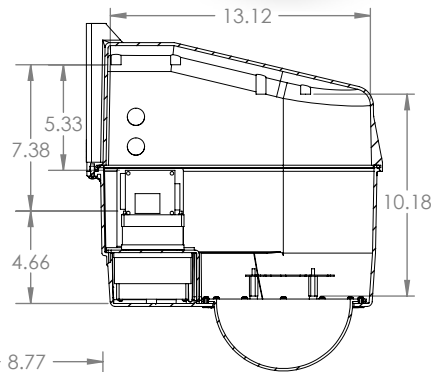

Applications:

Perfect for installations where temperature control is mission-critical:

- Optimized for AV / Broadcast grade PTZ camera applications
- Coastal or desert environments
- Remote solar-powered sites
- Airports and logistics hubs
- Smart city deployments